



# DG1000Z Series Function/Arbitrary Waveform Generator



- SiFi (Signal Fidelity) for 100% waveform replication
- 8Mpts (standard) or 16Mpts (optional) arbitrary waveform memory length for each channel
- Standard 2 full functional independent channels
- $\pm 1$ ppm frequency stability, -125dBc/Hz phase noise, 200ps low jitter
- Built-in 8 orders harmonics generator
- Built-in 7 digits/s counter up to 200MHz
- 160 built-in pre-edited waveforms
- Intuitive arbitrary waveform editing software.
- Full modulation supported: AM, FM, PM, ASK, FSK, PSK and PWM

DG1000Z series function/arbitrary waveform generator is a multi-functional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, Noise Generator, Pulse Generator, Harmonics Generator, Analog/Digital Modulator and Counter. As a multi-functional, high performance and portable generator, it will be a new selection in education, R&D, production, test and etc.



# DG1000Z Series Function/Arbitrary Waveform Generator



Dimensions: Width × Height × Depth=261.5mm × 112mm × 318.4mm  
Weight: 3.2kg (without package)

## ► Feature and Benefits



Standard 2 full functional channels



Arbitrary waveform function with innovative SiFi technology



Up to 160 built-in waveforms



Burst function



Multiple analog and digital modulations



Sweep function



Standard harmonic generator




Waveform summing function



Standard 7 digits/s full function frequency counter with 200MHz bandwidth



Channels and system setting

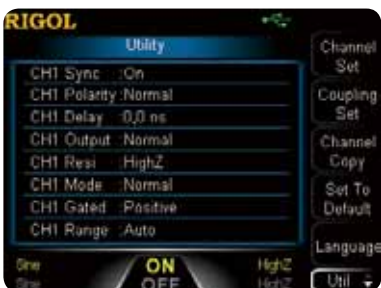

In line with LXI Core Device 2011



File Management Function



## ► Specifications

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration period and has performed self-calibration.
  - The generator has been working continuously for at least 30 minutes under the specified temperature (18°C ~ 28°C).
- All the specifications are guaranteed unless those marked with "typical".

Model	DG1032Z	DG1062Z
Channel	2	2
Max Frequency	30 MHz	60 MHz
Sample Rate	200 MSa/s	

<b>Waveform</b>		
Basic Waveform	Sine, Square, Ramp, Pulse, Noise	
Built-in Arbitrary Waveform	160 kinds, including Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, etc.	

<b>Frequency Characteristics</b>		
Sine	1 $\mu$ Hz to 30 MHz	1 $\mu$ Hz to 60MHz
Square	1 $\mu$ Hz to 15 MHz	1 $\mu$ Hz to 25 MHz
Ramp	1 $\mu$ Hz to 500kHz	1 $\mu$ Hz to 1MHz
Pulse	1 $\mu$ Hz to 15 MHz	1 $\mu$ Hz to 25 MHz
Harmonic	1uHz to 10MHz	1uHz to 20MHz
Noise (-3dB)	30 MHz bandwidth	60 MHz bandwidth
Arbitrary Waveform	1 $\mu$ Hz to 10 MHz	1 $\mu$ Hz to 20 MHz
Resolution	1 $\mu$ Hz	
Accuracy	$\pm$ 1 ppm of the setting value, 18°C to 28°C	

<b>Sine Wave Spectrum Purity</b>		
Harmonic Distortion	Typical (0 dBm) DC-10 MHz (included): <-65 dBc 10 MHz to 30 MHz (included): <-55 dBc 30 MHz to 60 MHz (included): <-50 dBc	
Total Harmonic Distortion	<0.075% (10 Hz to 20 kHz, 0 dBm)	
Spurious (non-harmonic)	Typical (0 dBm) $\leq$ 10 MHz <-70 dBc >10 MHz <-70 dBc + 6 dB/octave	
Phase Noise	Typical (0 dBm, 10 kHz offset) 10 MHz: <-125 dBc/Hz	

<b>Signal Characteristics</b>		
<b>Square</b>		
Rise/Fall Time	Typical (1 Vpp) <10ns	
Overshoot	Typical (100 kHz, 1 Vpp) $\leq$ 5%	
Duty Cycle	0.01% to 99.99% (limited by the current frequency setting)	
Non-symmetry	1% of the period + 5 ns	
Jitter (rms)	Typical (1 Vpp) $\leq$ 5 MHz 2 ppm + 200 ps > 5 MHz 200 ps	
<b>Ramp</b>		
Linearity	$\leq$ 1% of peak output (typical, 1 kHz, 1 VPP, 100% symmetry)	
Symmetry	0% to 100%	
<b>Pulse</b>		
Pulse Width	$\geq$ 16 ns (limited by the current frequency setting)	
Duty Cycle	0.001% to 99.999% (limited by the current frequency setting)	
Rising/Falling Edge	$\geq$ 10 ns (limited by the current frequency setting and pulse width setting)	
Overshoot	Typical (1 Vpp) $\leq$ 5%	
Jitter (rms)	Typical (1 Vpp) $\leq$ 5 MHz 2 ppm + 200 ps > 5 MHz 200 ps	
<b>Arbitrary Waveform</b>		
Waveform Length	8pts to 8Mpts (16Mpts optional)	
Vertical Resolution	14 bits	

Sample Rate	200MSa/s
Min Rise/Fall Time	Typical (1 Vpp) <10 ns
Jitter (rms)	Typical (1 Vpp) ≤5 MHz 2 ppm + 200 ps > 5 MHz 200 ps
Editing Mode	Point Edit, Block Edit, Insert Built-in Waveform
<b>Harmonic Output</b>	
Harmonic Order	≤8
Harmonic Type	Even Harmonic, Odd harmonic, Order Harmonic, User
Harmonic Amplitude	The amplitude of each order of harmonic can be set
Harmonic Phase	The phase of each order of harmonic can be set

### Output Characteristics

<b>Amplitude (into 50 Ω)</b>	
Range	≤10 MHz: 2.5 mVpp to 10 Vpp ≤30 MHz: 2.5 mVpp to 5.0 Vpp ≤60 MHz: 2.5 mVpp to 2.5 Vpp
Accuracy	Typical (1 kHz sine, 0 V offset, >10 mVpp, auto) ±(1% of the setting value) ±1 mV
Flatness	Typical (sine, 2.5 Vpp) ≤10 MHz ±0.1 dB ≤60 MHz ±0.2 dB
Unit	Vpp, Vrms, dBm
Resolution	0.1mVpp or 4 digits
<b>Offset (into 50 Ω)</b>	
Range (Peak ac+dc)	±5 V
Accuracy	±(1% of the setting value + 5mV + 0.5% of the amplitude)
<b>Waveform Output</b>	
Output Impedance	50 Ω (typical)
Protection	Short-circuit protection, automatically disable the waveform output when overload occurs

### Modulation Characteristics

Modulation Type	AM, FM, PM, ASK, FSK, PSK, PWM
<b>AM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulation Depth	0% to 120%
Modulating Frequency	2 mHz to 1 MHz
<b>FM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulating Frequency	2 mHz to 1 MHz
<b>PM</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Phase Deviation	0° to 360°
Modulating Frequency	2 mHz to 1 MHz
<b>ASK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 mHz to 1 MHz
<b>FSK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 mHz to 1 MHz
<b>PSK</b>	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle



Key Frequency	2 mHz to 1 MHz
<b>PWM</b>	
Carrier Waveform	Pulse
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Width Deviation	0% to 100% of the pulse width
Modulating Frequency	2 mHz to 1 MHz
<b>External Modulation Input</b>	
Input Range	75 mVRMS to $\pm 5$ Vac + dc
Input Bandwidth	50 kHz
Input Impedance	10K $\Omega$

<b>Burst Characteristics</b>		
Carrier Waveform	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)	
Carrier Frequency	2 mHz to 30 MHz	2 mHz to 60 MHz
Burst Count	1 to 1,000,000 or Infinite	
Start/Stop Phase	0° to 360°	
Internal Period	1 $\mu$ s to 500 s	
Gated Source	External Trigger	
Trigger Source	Internal, External or Manual	
Trigger Delay	0 ns to 100 s	

<b>Sweep Characteristics</b>		
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)	
Type	Linear, Log or Step	
Direction	Up or Down	
Start/Stop Frequency	The same with the upper/lower limit of the corresponding carrier frequency	
Sweep Time	1 ms to 500 s	
Hold/Return Time	0 ms to 500 s	
Trigger Source	Internal, External or Manual	
Marker	Falling edge of the sync signal (programmable)	

<b>Frequency Counter</b>			
Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle		
Frequency Resolution	7 digits/second (Gate Time = 1s)		
Frequency Range	1 $\mu$ Hz to 200 MHz		
Period Measurement	Measurement Range	5ns to 16 days	
Voltage Range and Sensitivity (non-modulating signal)			
DC Coupling	DC Offset Range	$\pm 1.5$ Vdc	
	1 $\mu$ Hz to 100 MHz	50 mVRMS to $\pm 2.5$ Vac + dc	
	100 MHz to 200 MHz	100 mVRMS to $\pm 2.5$ Vac + dc	
AC Coupling	1 $\mu$ Hz to 100 MHz	50 mVRMS to $\pm 2.5$ Vpp	
	100 MHz to 200 MHz	100 mVRMS to $\pm 2.5$ Vpp	
Pulse Width and Duty Cycle Measurement			
Frequency and Amplitude Ranges	1 $\mu$ Hz to 25 MHz	50 mVRMS to $\pm 2.5$ Vac + dc	DC Coupling
Pulse Width	Min Pulse Width	$\geq 20$ ns	
	Pulse Width Resolution	5 ns	
Duty Cycle	Measurement Range (display)	0% to 100%	
Input Characteristics			
Input Signal Range	Breakdown Voltage	$\pm 7$ Vac+dc	Input Impedance = 1 M $\Omega$
	Coupling Mode	AC	DC
Input Adjustment	High-frequency Rejection	On: Input Bandwidth = 250 kHz; Off: Input Bandwidth = 200 MHz	
	Trigger Level Range	-2.5V to +2.5V	
Input Trigger	Trigger Sensitivity Range	0% (about 140 mV hysteresis voltage) to 100% (about 2 mV hysteresis voltage)	
	Gate Time	GateTime1	1.310ms
GateTime2		10.48ms	
GateTime3		166.7ms	
GateTime4		1.342s	
GateTime5		10.73s	
GateTime6		>10s	

Trigger Characteristics	
Trigger Input	
Level	TTL-compatible
Slope	Rising or falling (selectable)
Pulse Width	>100ns
Latency	Sweep: <100 ns (typical) Burst: <300 ns (typical)
Trigger Output	
Level	TTL-compatible
Pulse Width	> 60 ns (typical)
Maximum Frequency	1 MHz

Reference Clock	
Phase Offset	
Range	0° to 360°
Resolution	0.03°
External Reference Input	
Lock Range	10 MHz ± 50 Hz
Level	250 mVpp to 5 Vpp
Lock Time	< 2 s
Input Impedance (Typical)	1 kΩ, AC coupling
Internal Reference Output	
Frequency	10 MHz ± 50 Hz
Level	3.3 Vpp
Input Impedance (Typical)	50 Ω, AC coupling

Sync Output	
Level	TTL-compatible
Impedance	50 Ω, nominal value

Overvoltage Protection	
Occurred when:	
<ul style="list-style-type: none"> <li>The instrument amplitude setting is greater than 2Vpp or the output offset is greater than <math> 2V_{DC} </math> and the input voltage is greater than <math>\pm 11.5 \times (1 \pm 5\%)V</math> (&lt;10kHz).</li> <li>The instrument amplitude setting is lower than or equal to 2Vpp or the output offset is lower than or equal to <math> 2V_{DC} </math> and the input voltage is greater than <math>\pm 3.5 \times (1 \pm 5\%)V</math> (&lt;10kHz).</li> </ul>	

General Specifications	
<b>Power Supply</b>	
Power Voltage	100 V to 240 V (45 Hz to 440 Hz)
Power Consumption	Lower than 40 W
Fuse	250 V, T3.15 A
<b>Display</b>	
Type	3.5-inch TFT LCD
Resolution	320 horizontal × RGB × 240 vertical resolution
Color	16 M color
<b>Environment</b>	
Temperature Range	Operating: 0°C to 50°C Non-operating: -40°C to 70°C
Cooling Method	Fan cooling
Humidity Range	Lower than 30°C : ≤95% relative humidity 30°C to 40°C : ≤75% relative humidity 40°C to 50°C : ≤45% relative humidity
Altitude	Operating: below 3000 meters Non-operating: below 15,000 meters
<b>Mechanical</b>	
Dimensions (W×H×D)	261.5 mm × 112 mm × 318.4 mm
Weight	Without Package: 3.2 kg With Package: 4.5 kg
Interfaces	USB Host, USB Device, LAN
IP Protection	IP2X
Calibration Interval	1 year recommended calibration interval

Certification Information		
EMC	in line with EN61326-1:2006	
	IEC 61000-3-2:2000	±4.0kV (contact discharge) ±4.0kV (air discharge)
	IEC 61000-4-3:2002	3 V/m (80 MHz to 1 GHz) 3 V/m (1.4 GHz to 2 GHz) 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004	1 kV power lines
	IEC 61000-4-5:2001	0.5kV (Phase to Neutral) 0.5kV (Phase to PE) 1 kV (Neutral to PE)
	IEC 61000-4-6:2003	3V,0.15MHz-80MHz
	IEC 61000-4-11:2004	Voltage dip: 0 % UT during half cycle 0 % UT during 1 cycle 70 % UT during 25 cycles Short interruption: 0 % UT during 250 cycles
Electrical Safety	Electrical Safety in line with USA:UL 61010-1:2012, Canada: CAN/CSA-C22.2 No. 61010-1:2012 EN 61010-1:2010	

## ► Ordering Information

	Description	Order Number
Model	DG1032Z (30MHz, Dual-channel)	DG1032Z
	DG1062Z (60MHz, Dual-channel)	DG1062Z
Standard Accessories	Power Cord	-
	USB Cable	CB-USBA-USBB-FF-150
	BNC Cable	CB-BNC-BNC-MM-100
	Quick Guide	-
	Resource CD (including User's Guide and etc.)	-
Options	16Mpts Memory for Arb	Arb16M-DG1000Z
	Rack Mount Kit (for single instrument)	RM-1-DG1000Z
	Rack Mount Kit (for dual instruments)	RM-2-DG1000Z
	40dB Attenuator	RA5040K
	10W Power Amplifier	PA1011
	USB-GPIB Converter	USB-GPIB

### Headquarter

RIGOL TECHNOLOGIES, INC.  
No.156,Cai He Village,  
Sha He Town,  
Chang Ping District, Beijing,  
102206 P.R.China  
Tel:+86-10-80706688  
Fax:+86-10-80705070  
Email: support@rigol.com

### USA

RIGOL TECHNOLOGIES  
USA,INC.  
7401 First Place,Suite N  
Oakwood Village  
OH 44146,USA  
Tel/Fax: 440-232-4488  
Toll free: 877-4-RIGOL-1  
Email: info@rigol.com

### Europe

RIGOL TECHNOLOGIES EU,  
GmbH  
Lindbergh str. 4  
82178 Puchheim, Germany  
Tel: +49(0)89-8941895-0  
Email: info-europe@rigol.com



**RIGOL®** is the registered trademark of RIGOL Technologies, Inc. Product information in this document subject to update without notice. For the latest information about RIGOL's products, applications and services, please contact local RIGOL office or access RIGOL official website:

[www.rigol.com](http://www.rigol.com)



## **ОФИЦИАЛЬНЫЙ ДИЛЕР В УКРАИНЕ:**

[storgom.ua](http://storgom.ua)

## **ГРАФИК РАБОТЫ:**

Пн. – Пт.: с 8:30 по 18:30

Сб.: с 09:00 по 16:00

Вс.: с 10:00 по 16:00

## **КОНТАКТЫ:**

+38 (044) 360-46-77

+38 (066) 77-395-77

+38 (097) 77-236-77

+38 (093) 360-46-77

Детальное описание товара: <https://storgom.ua/product/rigol-211362.html>

Другие товары: <https://storgom.ua/generatory-signalov.html>